


TOTAL ASSEMBLY LENGTH- XXXX

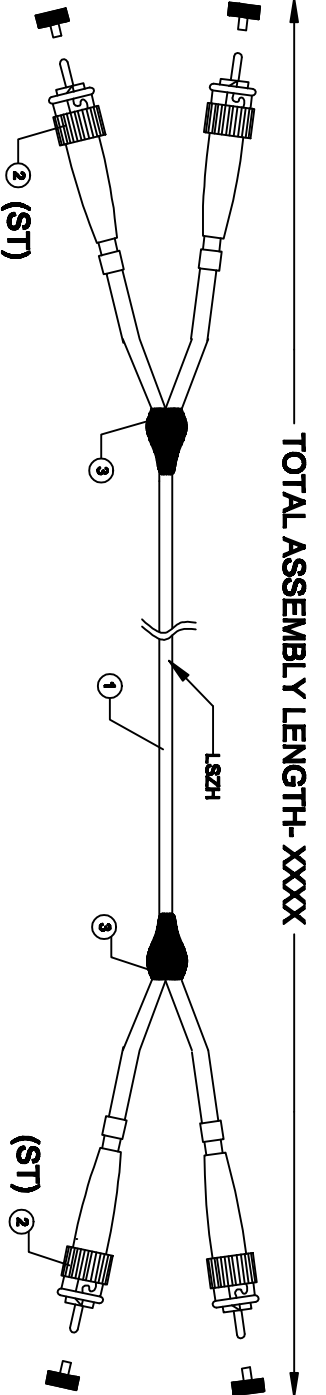

PERFORMANCE & SPECIFICATIONS

| | | |
|---|------|----------------|
| INSERTION LOSS (typical) | | <0.2 dB |
| FC | 40dB | |
| SPC | 45dB | |
| RETURN LOSS (TYPICAL) | | |
| UPC | 50dB | |
| APC | 60dB | |
| MATING DURABILITY (500 CYCLES) | | <0.2 dB |
| TEMPERATURE STABILITY | | <0.3 dB |
| OPERATING TEMPERATURE °C | | -40°C to +85°C |
| STORAGE TEMPERATURE °C | | -40°C to +85°C |
| STAINLESS METAL TUBE TENSILE STRENGTH (kgf) | | ≥ 20kgf |
| ANTI-PRESSURE (kg/100mm) | | ≥ 300kgf |
| WEIGHT | | 22.8kg/10m |

| | | |
|-----|------------|--|
| 3 | GROMMET | GROMMET, COLOR: BLACK |
| 2 | CONNECTORS | ST CONNECTORS, QUANTITY: 4 |
| 1 | CABLE | 80/125 MULTIMODE DUPLEX ARMORED OPTICAL FIBER CABLE, LSZH, COLOR: GRAY |
| NO. | ITEM | DESCRIPTION |

*PLEASE NOTE: LAST 4 DIGITS DENOTES LENGTH IN METERS
I.E. J1220-003M = 3 METER CABLE

| REVISION | | | | |
|----------|--------------------|---------|---------|----------|
| REV/ | DESCRIPTION | ECO NO. | QTY. BY | DATE |
| 1 | Added Terminations | N/A | T.G. | 11/08/09 |
| 2 | | | | |
| 3 | | | | |

THIS DOCUMENT IS THE PROPERTY OF J1220 ELECTRONICS, INC. IT IS TO BE USED IN ANY WAY WITHOUT THE CONSENT OF J1220 ELECTRONICS, INC.

THIS DOCUMENT IS THE PROPERTY OF J1220 ELECTRONICS, INC. IT IS TO BE USED IN ANY WAY WITHOUT THE CONSENT OF J1220 ELECTRONICS, INC.

1000K < 1 meter +0.0mm, -0.0mm
1000K > 1 meter +0.0mm, -0.0mm

THIRD ANGLE PROJECTION

SCALE: 1:1

DATE: 08/09/09

QTY: 1 OF 1

J1220-XXXX

REV. 1

J1220 ELECTRONICS, INC.
23 VANTONAL DRIVE, FRANKLIN, MA 02035

80/125 817/87 Duplex Multimode Armored Cable