


TOTAL ASSEMBLY LENGTH- XXXX

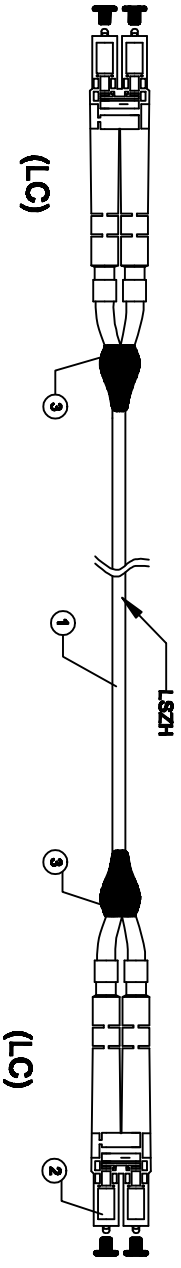

PERFORMANCE & SPECIFICATIONS

INSERTION LOSS (typical)	<0.3 dB	
RETURN LOSS (TYPICAL)	PC	40dB
	SPC	45dB
	UPC	50dB
APC	55dB	
MATING DURABILITY (500 CYCLES)	<0.2 dB	
TEMPERATURE STABILITY	<0.3 dB	
OPERATING TEMPERATURE °C	-40°C to +85°C	
STORAGE TEMPERATURE °C	-40°C to +85°C	
STAINLESS METAL TUBE TENSILE STRENGTH (kgf)	≥ 200kgf	
ANTI-PRESSURE (kgf/100mm)	≥ 200kgf	
WEIGHT	22.8kg/gkm	

3	GROMMET	GROMMET, COLOR: BLACK
2	CONNECTORS	LC CONNECTORS, QUANTITY: 4
1	CABLE	50/125 MULTIMODE DUPLEX ARMORED OPTICAL FIBER CABLE, LSZH, COLOR: GRAY
NO.	ITEM	DESCRIPTION

*PLEASE NOTE: LAST 4 DIGITS DENOTES LENGTH IN METERS
I.E. J1227-003M = 3 METER CABLE

REVISION				
REV	DESCRIPTION	ECO NO.	CHG. BY	DATE
1	Added Titleblock	NA	T.B.	11/08/09
2				
3				

USE THESE OTHER MARKING SPECIFICATIONS
TOLERANCES IN INCHES/MILLIMETERS
TOLERANCES:

XXXX < 1mm: +0.1mm, -0mm
XXXX > 1mm: +0.1mm, -0mm

THIS DOCUMENT IS THE PROPERTY OF J1227-XXXX. IT IS TO BE USED ONLY FOR THE PROJECT AND WITHOUT THE CONSENT OF J1227 ELECTRONICS, INC.

THIRD ANGLE PROJECTION

J1227-XXXX

SCALE: 1:1

DATE: 08/09/09

SHEET: 1 OF 1

J1227 ELECTRONICS, INC.
23 NATIONAL DRIVE, FRANKLIN, MA 02035

60/125 LC/LC Duplex Multimode Armored Cable