


TOTAL ASSEMBLY LENGTH- XXXX

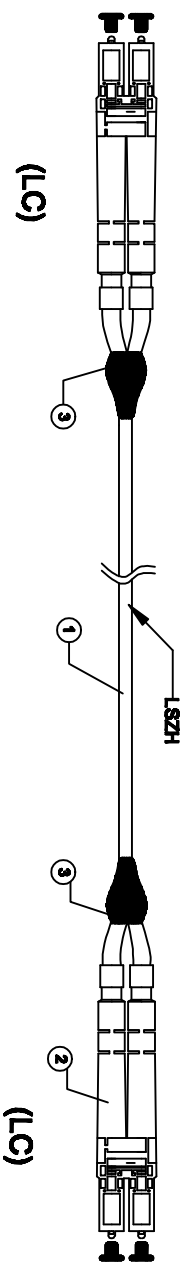

PERFORMANCE & SPECIFICATIONS

INSERTION LOSS (typical)	<0.2 dB
RETURN LOSS (TYPICAL)	
PC	40dB
SPC	45dB
UPC	50dB
APC	60dB
MATING DURABILITY (500 CYCLES)	<0.2 dB
TEMPERATURE STABILITY	<0.3 dB
OPERATING TEMPERATURE °C	-40°C to +85°C
STORAGE TEMPERATURE °C	-40°C to +85°C
STAINLESS METAL TUBE TENSILE STRENGTH (kgf)	≥ 200kgf
ANTI-PRESSURE (kgf/100mm)	≥ 300kgf
WEIGHT	22.8kg/100m

3	GROMMET	GROMMET, COLOR: BLACK
2	CONNECTORS	LC CONNECTORS, QUANTITY: 4
1	CABLE	Ø125 SINGLEMODE DUPLEX ARMORED OPTICAL FIBER CABLE, LSZH, COLOR: BLUE
NO.	ITEM	DESCRIPTION

PLEASE NOTE: LAST 4 DIGITS DENOTES LENGTH IN METERS
 I.E. J1247-003M = 3 METER CABLE

REV	DESCRIPTION	ECO NO.	CHK BY	DATE	APPROVED
1	Added Thickness	NA	T.B.	11/09/09	T.B.
2					
3					

OTHER SPECIFICATIONS
 TOLERANCES IN DIMENSIONS UNLESS SPECIFIED:
 XXXX ± 1mm 41mm ± 0mm
 XXXX ± 1mm 41mm ± 0mm

THIS DOCUMENT IS THE PROPERTY OF J1247-XXXX. IT SHALL NOT BE USED IN ANY WAY WITHOUT THE CONSENT OF J1247-XXXX, INC.

THIRD ANGLE PROJECTION

J1247-XXXX

SCALE: 1:1

DATE: 11/09/09

SHEET: 1 OF 1

J1247 ELECTRONICS, INC.
 23 VANTONAL DRIVE, FRANKLIN, MA 02038
 87126 LC/LC Duplex Singlemode Armored Cable