


TOTAL ASSEMBLY LENGTH- XXXX

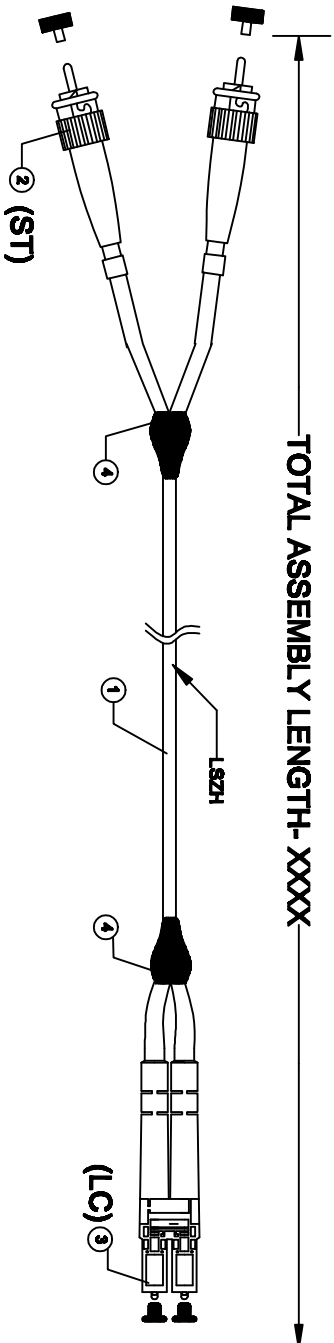

PERFORMANCE & SPECIFICATIONS

INSERTION LOSS (typical)	-0.2 dB	
RETURN LOSS (TYPICAL)	PC	40dB
	SFC	46dB
	UPC	50dB
	APC	66dB
MATING DURABILITY (500 CYCLES)	-0.2 dB	
TEMPERATURE STABILITY	-0.3 dB	
OPERATING TEMPERATURE °C	-40°C to +85°C	
STORAGE TEMPERATURE °C	-40°C to +85°C	
STAINLESS METAL TUBE TENSILE STRENGTH (KG)	≥ 23kgf	
ANTI-PRESSURE (KG/100mm)	≥ 300kgf	
WEIGHT	22.5kg/10m	

1	CABLE	8/125 SINGLEMODE DUPLEX ARMORED OPTICAL FIBER CABLE, LSZH, COLORE BLUE
2	CONNECTORS	8T CONNECTORS, QUANTITY: 2
3	CONNECTORS	LC CONNECTORS, QUANTITY: 2
4	GROMMET	GROMMET, COLORE BLACK

*PLEASE NOTE: LAST 4 DIGITS DENOTES LENGTH IN METERS
I.E. J1248-003M = 3 METER CABLE

REV/	DESCRIPTION	ECN NO.	CHG. BY	DATE	APPROVED
1	Added Termination	NA	TJA	11/08/09	TJA
2					
3					

PLEASE OBTAIN THE SPECIFIED TOLERANCES IN ALL DIMENSIONS. TOLERANCES:

XXXX < 1mm ± 0.1mm, 0.2mm
 XXXX > 1mm ± 0.1mm, 0.2mm

THIS DOCUMENT IS THE PROPERTY OF J1248-XXXX. IT IS TO BE USED ONLY FOR THE PROJECT AND WITHOUT THE CONSENT OF J1248-XXXX, INC.

THIRD ANGLE PROJECTION

J1248-XXXX

SCALE: 1:1

DATE: 11/08/09

SHEET: 1 OF 1

J1248-XXXX

23 NATIONAL DRIVE, FRANKLIN, MA 02045

8/125 LC8T Duplex Singlemode Armored Cable