


TOTAL ASSEMBLY LENGTH-XXXX

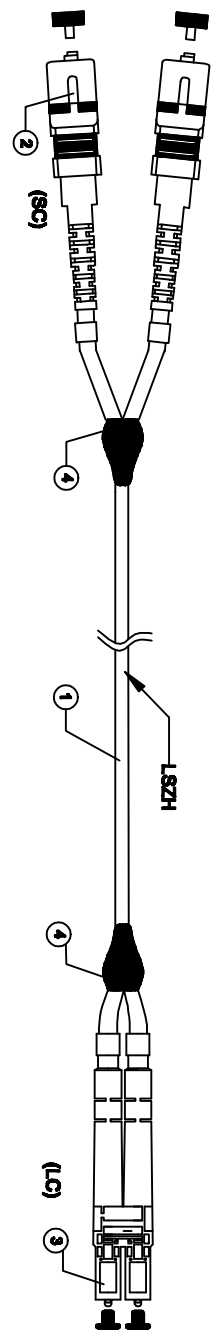

PERFORMANCE & SPECIFICATIONS

INSERTION LOSS (typical)		<0.2 dB
PC	40dB	
RETURN LOSS (TYPICAL)	8PC	45dB
	UPC	50dB
	APC	65dB
MATING DURABILITY (500 CYCLES)		<0.2 dB
TEMPERATURE STABILITY		<0.3 dB
OPERATING TEMPERATURE °C		-40°C to +85°C
STORAGE TEMPERATURE °C		-40°C to +85°C
STAINLESS METAL TUBE TENSILE STRENGTH (KGF)		≥ 20Kgf
ANTI-PRESSURE (Kgf/100mm)		≥ 300Kgf
WEIGHT		22.8g/m

4	GROMMET	GROMMET, COLOR: BLACK
3	CONNECTORS	LC CONNECTORS, QUANTITY: 2
2	CONNECTORS	SC CONNECTORS, QUANTITY: 2
1	CABLE	9/125 SINGLE MODE DUPLEX ARRANGED OPTICAL FIBER CABLE, LSZH, COLOR: BLUE
NO.	ITEM	DESCRIPTION

*PLEASE NOTE: LAST 4 DIGITS DENOTES LENGTH IN METERS
I.E. J1249-003M = 3 METER CABLE

REVISION					
REV/	DESCRIPTION	ECO NO.	CHG. BY	DATE	APPROVED
1	Added Titleblock	NA	TJA	11/28/09	TJA
2					
3					

THIS DOCUMENT IS THE PROPERTY OF J1249-XXXX. IT IS TO BE USED ONLY FOR THE PROJECT AND SHALL NOT BE USED IN ANY WAY WITHOUT THE CONSENT OF J1249-XXXX, INC.

THIRD ANGLE PROJECTION

J1249-XXXX

SCALE: 1:1

DATE: 11/28/09

REV: 1 OF 1