


TOTAL ASSEMBLY LENGTH- XXXX

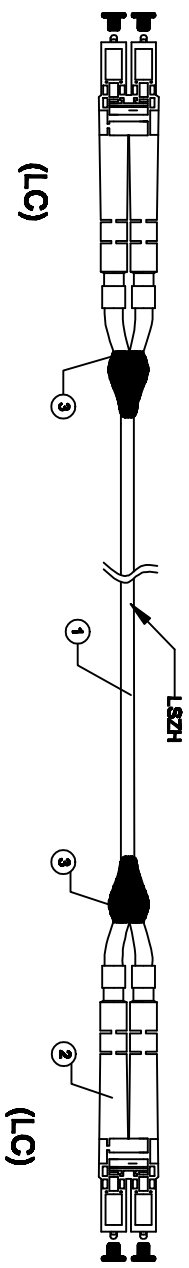

PERFORMANCE & SPECIFICATIONS

INSERTION LOSS (typical)	<0.2 dB
RETURN LOSS (TYPICAL)	
PC	40dB
SPC	45dB
UPC	50dB
APC	55dB
MATING DURABILITY (500 CYCLES)	<0.2 dB
TEMPERATURE STABILITY	<0.3 dB
OPERATING TEMPERATURE °C	-40°C to +85°C
STORAGE TEMPERATURE °C	-40°C to +85°C
STAINLESS METAL TUBE TENSILE STRENGTH (kg)	≥ 200kg
ANTI-PRESSURE (kg/100mm)	≥ 300kg
WEIGHT	22.8g/m

3	GROMMET	GROMMET, COLOR: BLACK
2	CONNECTORS	LC CONNECTORS, QUANTITY: 4
1	CABLE	82.8/125 MULTICORE DUPLEX ARMORED OPTICAL FIBER CABLE, LSZH, COLOR: GRAY
NO.	ITEM	DESCRIPTION

***PLEASE NOTE: LAST 4 DIGITS DENOTES LENGTH IN METERS
I.E. J1207-003M = 3 METER CABLE**

REV.	DESCRIPTION	ECO NO.	CHG. BY	DATE	APPROVED
1	Added Titleblock	NA	T.G.	1/6/2018	T.G.
2					
3					

UNLESS OTHERWISE SPECIFIED TOLERANCES IN DIMENSIONS:

XXX.X mm ±0.1mm, 0.1mm
 XXX.X mm ±0.05mm, 0.05mm
 XXX.X mm ±0.02mm, 0.02mm

THIS DOCUMENT IS THE PROPERTY OF J1207-XXXX. IT IS TO BE USED ONLY FOR THE PROJECT AND SHALL NOT BE USED IN ANY WAY WITHOUT THE CONSENT OF J1207 ELECTRONICS, INC.

THIRD ANGLE PROJECTION

J1207-XXXX

SCALE: 1:1

DATE: 01/06/18

REV: 1 OF 1

J1207 ELECTRONICS, INC.
 23 NATIONAL DRIVE, FRANKLIN, MA 01920

82.8/125 LC/LC Duplex Multicore Armored Cable