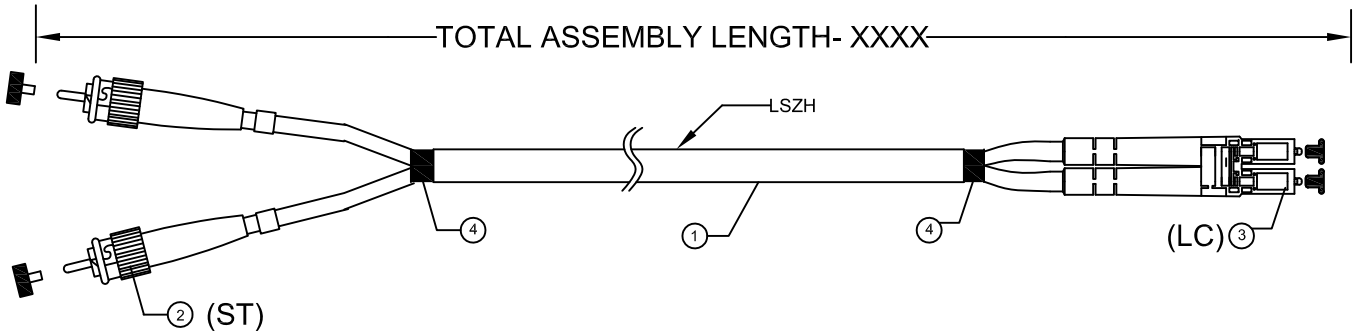

PERFORMANCE & SPECIFICATIONS				
INSERTION LOSS (typical)		<0.2 dB		
RETURN LOSS (TYPICAL)	PC	40dB		
	SPC	45dB		
	UPC	50dB		
	APC	65dB		
MATING DURABILITY (500 CYCLES)		<0.2 dB		
TEMPERATURE STABILITY		<0.3 dB		
OPERATING TEMPERATURE °C		-40°C to +85°C		
STORAGE TEMPERATURE °C		-40°C to +85°C		
STAINLESS METAL TUBE TENSILE STRINGTH (Kgf.)		≧ 20Kgf		
ANTI-PRESSURE (Kgf./100mm)		≧ 300Kgf		
WEIGHT		22.5Kg/Km		

NO.	ITEM	DESCRIPTION
4	TUBING	SHRINK TUBING (BLACK)
3	CONNECTORS	LC CONNECTORS, QUANTITY: 2
2	CONNECTORS	ST CONNECTORS, QUANTITY: 2
1	CABLE	62.5/125 MULTIMODE DUPLEX ARMORED OPTICAL FIBER CABLE, LSZH, COLOR: GRAY

*PLEASE NOTE: LAST 4 DIGITS DENOTES LENGTH IN METERS
I.E. J1208-003M = 3 METER CABLE

REVISION					
REV	DESCRIPTION	ECO No.	CHG. BY	DATE	APPROVED
1	Added Tolerance	N/A	T.G.	11/06/09	T.G.
2					
3					

UNLESS OTHERWISE SPECIFIED TOLERANCE IS IN CENITMETERS.

TOLERANCES:

XXXX ≦ 1 meter +5 cm, -0 cm

XXXX > 1 meter +10 cm, -0 cm

THIS DOCUMENT IS THE CONFIDENTIAL PROPERTY OF JEM ELECTRONICS, INC. AND SHALL NOT BE USED IN ANY WAY WITHOUT THE CONSENT OF JEM ELECTRONICS, INC.

THIRD ANGLE PROJECTION

JEM ELECTRONICS, INC.
23 NATIONAL DRIVE, FRANKLIN, MA 02038

DRAWING NAME: 62.5/125 LC/ST Duplex Multimode Armored Cable

DRAWING NO. J1208-XXXX Rev. 1

SCALE 1:1 | DATE: 01/04/10 | SHEET: 1 OF 1