


TOTAL ASSEMBLY LENGTH- XXXX

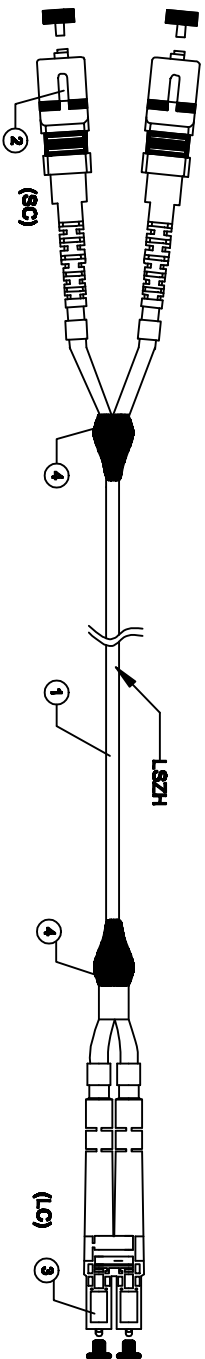

PERFORMANCE & SPECIFICATIONS

INSERTION LOSS (typical)	<0.2 dB	
RETURN LOSS (TYPICAL)	PC	40dB
	SPC	45dB
	UPC	50dB
APC	65dB	
MATING DURABILITY (500 CYCLES)	<0.2 dB	
TEMPERATURE STABILITY	<0.3 dB	
OPERATING TEMPERATURE °C	-40°C to +85°C	
STORAGE TEMPERATURE °C	-40°C to +85°C	
STAINLESS METAL TUBE TENSILE STRENGTH (kgf)	≥ 200kgf	
ANTI-PRESSURE (kgf/100mm)	≥ 500kgf	
WEIGHT	22.8g/Km	

4	GROMMET	GROMMET, COLOR: BLACK
3	CONNECTORS	LC CONNECTORS, QUANTITY: 2
2	CONNECTORS	SC CONNECTORS, QUANTITY: 2
1	CABLE	62.5/125 MULTIMODE DUPLEX ARMORED OPTICAL FIBER CABLE, LSZH, COLOR: GRAY
NO.	ITEM	DESCRIPTION

*PLEASE NOTE: LAST 4 DIGITS DENOTES LENGTH IN METERS

I.E. J1209-003M = 3 METER CABLE

REV/	DESCRIPTION	ECO NO.	CHG. BY	DATE	APPROVED
1	Added Titleblock	NA	TJA	11/20/09	TJA
2					
3					

ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED TO BE IN MILLIMETERS
TOLERANCES:
XXX.X ± 0.1mm *0.1mm - 0.4mm
XXX.X ± 0.1mm *0.1mm - 0.4mm
XXX.X ± 0.1mm *0.1mm - 0.4mm

THIS DOCUMENT IS THE PROPERTY OF JFE ELECTRONICS, INC. IT SHALL NOT BE LOANED, REPRODUCED, COPIED, OR TRANSMITTED IN ANY MANNER WITHOUT THE CONSENT OF JFE ELECTRONICS, INC.

THIRD ANGLE PROJECTION

JFE ELECTRONICS, INC.
23 VANTONAL DRIVE, FRANKLIN, MA 01920
PHONE: 978-366-1100
FAX: 978-366-1101
WWW.JFE-USA.COM

ORDERING INFO: **J1209-XXXX**

SCALE: 1:1 DATE: 08/20/09 SHEET: 1 OF 1