


← TOTAL ASSEMBLY LENGTH - XXXX →

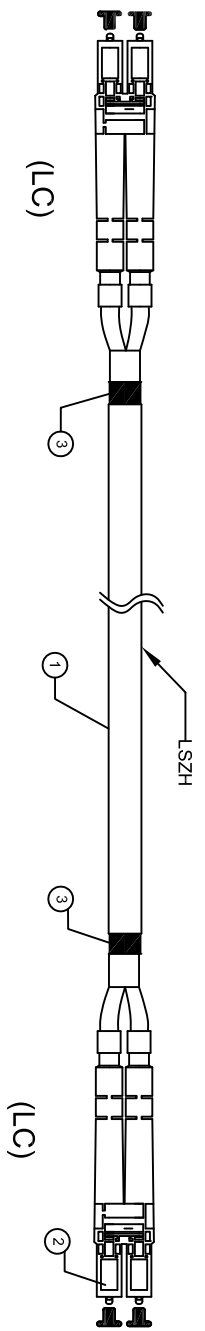

PERFORMANCE & SPECIFICATIONS

INSERTION LOSS (typical)	<0.2 dB
RETURN LOSS (TYPICAL)	
PC	40dB
SPC	45dB
UPC	50dB
APC	65dB
MATING DURABILITY (500 CYCLES)	<0.2 dB
TEMPERATURE STABILITY	<0.3 dB
OPERATING TEMPERATURE °C	-40° C to +85° C
STORAGE TEMPERATURE °C	-40° C to +85° C
STAINLESS METAL TUBE TENSILE STRENGTH (kgf)	≥ 20kgf
ANTI-PRESSURE (kgf/100mm)	≥ 300kgf
WEIGHT	22.5kg/km

3	TUBING	SHRINK TUBING (BLACK)
2	CONNECTORS	LC CONNECTORS, QUANTITY: 4
1	CABLE	50/125 MULTIMODE DUPLEX ARMORED OPTICAL FIBER CABLE, LSZH, COLOR: GRAY
NO.	ITEM	DESCRIPTION

\*PLEASE NOTE: LAST 4 DIGITS DENOTES LENGTH IN METERS  
I.E. J1227-003M = 3 METER CABLE

REV	DESCRIPTION	ECO No.	CHG. BY	DATE	APPROVED
1	Added Tolerances	N/A	T.G.	11/06/09	T.G.
2					
3					

UNLESS OTHERWISE SPECIFIED TOLERANCE IS IN CENTIMETERS  
TOLERANCES:  
XXXX ± 1 meter +5 cm, -0 cm  
XXXX ± 1 meter +10 cm, -0 cm

THIS DOCUMENT IS THE CONFIDENTIAL PROPERTY OF JEM ELECTRONICS, INC. AND SHALL NOT BE USED, REPRODUCED, COPIED, OR TRANSMITTED WITHOUT THE CONSENT OF JEM ELECTRONICS, INC.

**JEM ELECTRONICS, INC.**  
23 NATIONAL DRIVE, FRANKLIN, MA 02038  
DRAWING NAME: 50/125 LC/LC Duplex Multimode Armored Cable  
DRAWING NO: J1227-XXXX  
SCALE: 1:1 DATE: 01/04/10 SHEET: 1 OF 1