


TOTAL ASSEMBLY LENGTH- XXXX

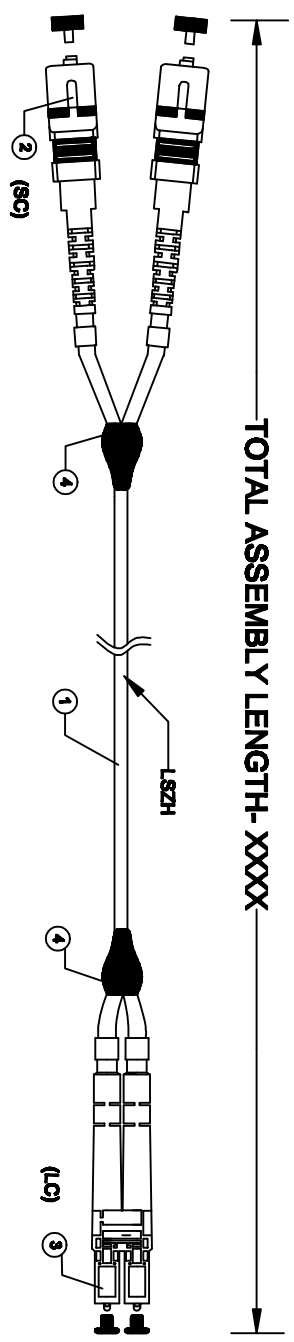

PERFORMANCE & SPECIFICATIONS	
INSERTION LOSS (typical)	<0.2 dB
PC	40dB
SPC	45dB
UPC	50dB
APC	55dB
MATING DURABILITY (500 CYCLES)	<0.2 dB
TEMPERATURE STABILITY	<0.3 dB
OPERATING TEMPERATURE °C	-40°C to +85°C
STORAGE TEMPERATURE °C	-40°C to +85°C
STAINLESS METAL TUBE TENSILE STRENGTH (KG)	≥ 200KG
ANTI-PRESSURE (KG/100mm)	≥ 200KG
WEIGHT	22.5Kg/Km

4	GROMMET	GROMMET, COLOR: BLACK
3	CONNECTORS	LC CONNECTORS, QUANTITY: 2
2	CONNECTORS	SC CONNECTORS, QUANTITY: 2
1	CABLE	80/125 MULTIMODE DUPLEX ARMORED OPTICAL FIBER CABLE, LSZH, COLOR: GRAY
NO.	ITEM	DESCRIPTION

\*PLEASE NOTE: LAST 4 DIGITS DENOTES LENGTH IN METERS  
I.E. J1229-003M = 3 METER CABLE

REVISION				
REV	DESCRIPTION	ECO NO.	CHG. BY	DATE
1	Added Titleblock	N/A	T.G.	11/28/20
2				
3				

UNLESS OTHERWISE SPECIFIED  
TOLERANCES IN DIMENSIONS  
TOLERANCES:  
1000 < 1mm ±0.1mm, 0.1mm  
1000 > 1mm ±0.1mm, 0.1mm

THIS DOCUMENT IS THE  
PROPERTY OF J1229-XXXX  
AND SHALL NOT BE USED IN ANY WAY  
WITHOUT THE CONSENT OF  
J&E ELECTRONICS, INC.

THIRD ANGLE PROJECTION

**J&E ELECTRONICS, INC.**  
23 NATIONAL DRIVE, FRANKLIN, MA 02035  
80/125 LC/SC Duplex Multimode Armored Cable

SCALE: 1:1  
DATE: 11/28/20  
SHEET: 1 OF 1