


TOTAL ASSEMBLY LENGTH- XXXX

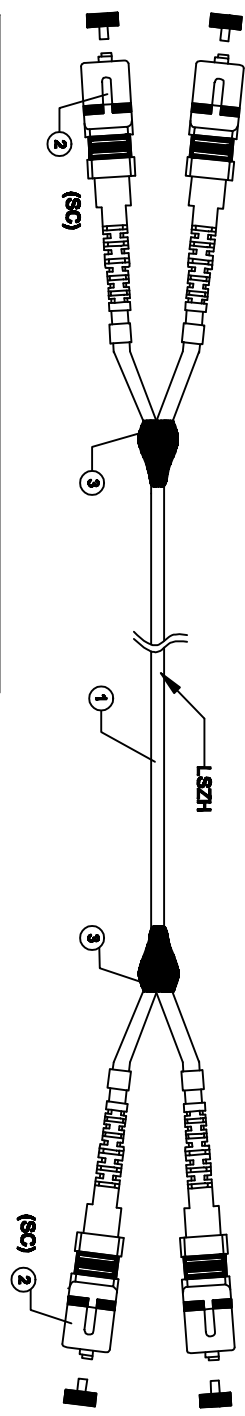

PERFORMANCE & SPECIFICATIONS

INSERTION LOSS (typical)		<math>< -0.2 \text{ dB}</math>
RETURN LOSS (TYPICAL)	PC	40dB
	SPC	45dB
	UPC	50dB
	APC	65dB
MATING DURABILITY (500 CYCLES)		<math>< -0.2 \text{ dB}</math>
TEMPERATURE STABILITY		<math>< -0.3 \text{ dB}</math>
OPERATING TEMPERATURE °C		-40°C to +85°C
STORAGE TEMPERATURE °C		-40°C to +85°C
STAINLESS METAL TUBE TENSILE STRENGTH (N/A)		$\geq 200\text{kgf}$
ANTI-PRESSURE (kg/100mm)		$\geq 300\text{kgf}$
WEIGHT		22.2kg/10m

3	GROMMET	GROMMET, COLOR: BLACK
2	CONNECTORS	SC CONNECTORS, QUANTITY: 4
1	CABLE	9125 SINGLEMODE DUPLEX BY ABSORBED OPTICAL FIBER CABLE, LSZH, COLOR: BLUE
NO.	ITEM	DESCRIPTION

***PLEASE NOTE: LAST 4 DIGITS DENOTES LENGTH IN METERS
I.E. J1241-003M = 3 METER CABLE**

REVISION				
REV/	DESCRIPTION	ECO NO.	CHG. BY	DATE
1	Added Telephone	NA	T.A.	11/09/09
2				
3				

PLEASE OBSERVE THE FOLLOWING PRECAUTIONS:
 TELEPHONE: 1000 < 1 meter +4mm, 4mm
 1000 > 1 meter +9mm, 9mm

THIS DOCUMENT IS THE PROPERTY OF J1241-XXXX. IT IS TO BE USED IN ANY WAY WITHOUT THE CONSENT OF J1241-XXXX, INC.

THIRD ANGLE PROJECTION

J1241-XXXX

SCALE: 1:1

DATE: 09/09

SHEET: 1 OF 1

J1241 ELECTRONICS, INC.
 23 NATIONAL DRIVE, FRANKLIN, MA 02035

9125 SC/SC Duplex Singlemode Armored Cable